

ASLAN's strongest

VERSATILE SOLUTIONS WITH STRONG ADHESION



Discover our range of premium, high-tack digital printing films. This product line is characterised by exceptional adhesive strength, ranging from 16 to 34 N/25 mm. The films offer versatile solutions for demanding applications where maximum adhesion is required. From the solvent-resistant **MonsterTack ASLAN DFP 05** to the UltraTack series, which includes the **LoopPET UltraTack ASLAN DRP 07** – a sustainable solution made from 30 % recycled polyester.

For specific requirements, we offer additional versions: **Hi!Tack Removable ASLAN DFP 10** combines strong adhesive power with clean removability, making it ideal for temporary applications. **Hi!Tack Dryapply Grey ASLAN DFL 09G** features the proven ASLAN Dryapply technology, which enables an exceptionally easy and bubble-free application, and is also equipped with a grey adhesive for particularly high opacity. With this comprehensive range of high-tack films, you are guaranteed to find the perfect solution for your project, whether it's for permanent installations, flexible and easily removable applications, or sustainable solutions.

Versatile solutions for demanding surfaces


	ADVANTAGES	APPLICATION
MonsterTack ASLAN DFP 05	Resistant to solvent vapours and lubricating oil, monster-strong adhesive, can be applied from -10° C	Petrol pumps, painted and powder-coated surfaces, plywood
UltraTack ASLAN DFP 06, 07(G), 08(G)	Available in five versions (matt, glossy, clear, grey adhesive), special adhesive with exceptionally high tack, can be applied from 5° C	Rough, textured, highly absorbent, or low-energy surfaces
Hi!Tack Dryapply Grey ASLAN DFL 09G	With proven ASLAN Dryapply technology for particularly easy application, grey special high-tack adhesive, can be applied from 15° C	Smooth and low-energy surfaces
Hi!Tack Removable ASLAN DFP 10	Clean removable from a variety of substrates, special high-tack adhesive, can be applied from 15° C	Concrete, rough plaster, brick walls, powder coatings, highly absorbent substrates, ceramics, wood, MDF boards, acrylic, painted surfaces
LoopPET UltraTack ASLAN DRP 07	Made from 30 % recycled PET, special high-tack adhesive, can be applied from 5° C	Low-energy, smooth surfaces

WANT TO KNOW MORE? Order your samples on www.aslanfolien.de




CHARACTERISTICS	MonsterTack ASLAN DFP 05	UltraTack ASLAN DFP 06, 07(G), 08(G)	Hi!Tack Dryapply Grey ASLAN DFL 09G	Hi!Tack Removable ASLAN DFP 10	LoopPET UltraTack ASLAN DRP 07 PCR PET
ADHESIVE STRENGTH (ASTM D903, 72 HOURS)	Monster-tack 34 N/25 mm	High-tack all-rounders 22 N/25 mm	Strong adhesion and with ASLAN Dryapply technology 16 N/25 mm	High-tack and remo- vable 22 N/25 mm	High-tack and PVC free 22 N/25 mm
PRINTABILITY	[Eco-]Solvent, latex, UV curable and screen printing inks				Latex, UV curable and screen printing inks
OUTDOOR DURABILITY	up to 7 years				up to 3 years
DIMENSIONS	1.22 m x 50 m	1.37 m x 50 m			

How to find the right film for my application?

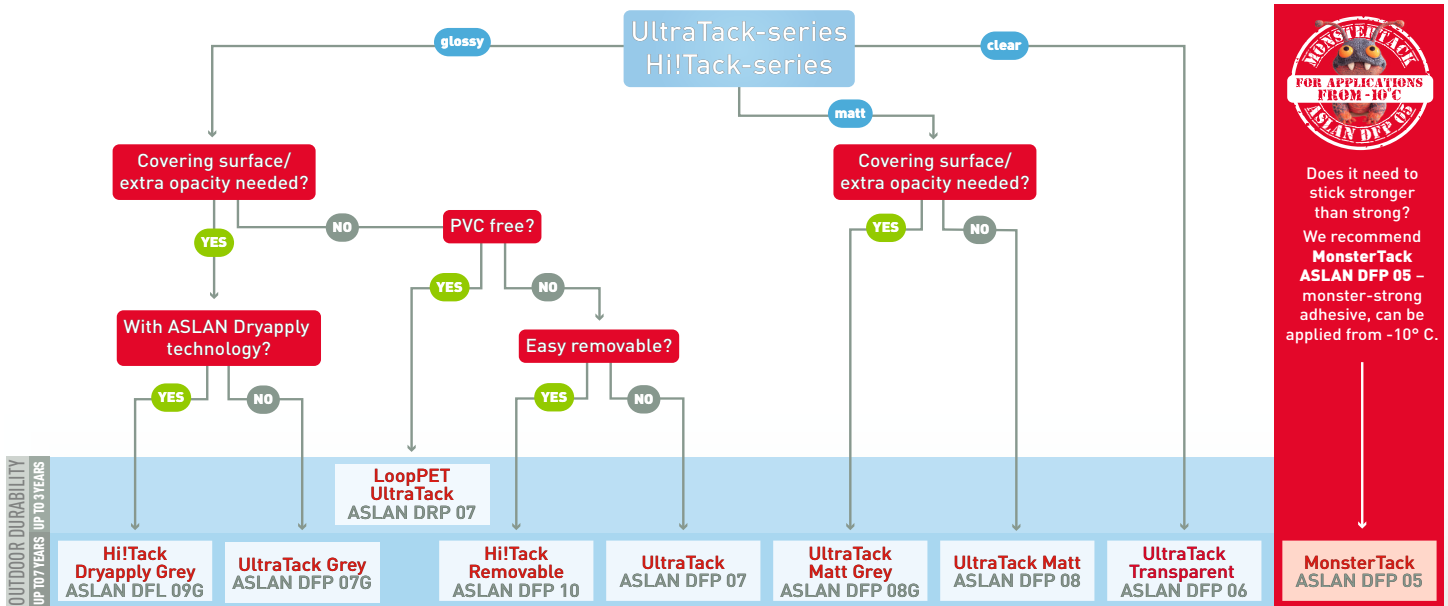

Does it need to stick stronger than strong?
We recommend **MonsterTack ASLAN DFP 05** – monster-strong adhesive, can be applied from -10° C.

Please note: This decision tree can only provide support and cannot reflect all individual circumstances. ASLAN recommends test applications in order to make a reliable decision.



WANT TO KNOW MORE?

Order your samples on
www.aslanfolien.de

Please contact us

Fon +49 2204 708 80
E-Mail info@aslanfolien.de

For more information please visit
www.aslanfolien.de



ASLAN Selbstklebefolien GmbH | Oberauel 2 | 51491 Overath | Germany

ASLAN
EXPERTISE IN SELF-ADHESIVE FILMS